HLX85 Series

CO₂ Transmitter and Switches for Duct Mounting

Duct mounted CO₂ transmitters and switches of the HLX85 series are designed for HVAC applications. The CO₂ sensing element uses the Non-Dispersive Infrared Technology (NDIR). A patented auto-calibration procedure compensates for drift caused by the aging of the sensing element and guarantees outstanding long term stability.

Installed into a duct a small flow of air will be established by convection through the probe into the transmitter housing and back into the duct. Inside the transmitter housing the air will diffuse through a membrane into the CO₂ sensing element.

The operation in closed loop air stream avoids pollution of the $\rm CO_2$ sensor.

Measuring ranges of 0...2000/5000/10000ppm correspond to an analogue interface of 0 - 5/10V or 4 - 20mA. Selectively a switching

output with adjustable switching point and hysteresis is available. The instruments can be easily positioned in the duct with the standard mounting flange.

Typical Applications

building management for residental and office areas ventilation control

very simple installation compact housing auto-calibration measuring ranges: 0...10000ppm analogue or switching output

Technical Data

Measuring Values					
CO2					
Measurement principle	Non-Dispersive Infrared Technology (NDIR)				
Sensing element	E+E Dual Source Infrared System				
Measuring range	02000 / 5000 / 10000ppm				
Accuracy at 25°C (77°F)	02000ppm: < ± (50ppm +2% of measuring value) 05000ppm: < ± (50ppm +3% of measuring value)				
and 1013mbar	05000ppm:	< ± (50ppm +3% of measuring value)			
	010000ppm:	< ± (100ppm +5% of measuring value)			
Response time $\tau_{s3}^{(1)}$	< 195s				
Temperature dependence	typ. 2ppm CO,/°C				
Long term stability	typ. 20ppm / year				
Sample rate	approx. 15s				
Temperature (passive output)					
Type of T-Sensor	please see ordering guide				
Dutputs ²⁾					
Analogue Output					
02000 / 5000 / 10000ppm	0 - 5V	-1mA < I, < 1mA			
	0 - 10V	-1mA < I < 1mA			
	4 - 20mA	R, < 500 Ohm			
Switching Output		L			
Max. switching voltage	50V AC / 60V DC				
Max. switching load	0.7A at 50V AC	1A at 24V DC			
Min. switching load	1mA at 5V DC				
Contact material	Ag+Au clad				
General	U U				
Supply voltage	24V AC ±20%	15 - 35V DC			
Current consumption	typ. 10mA + output current				
•	max. 0.5A for 0.3s				
Warm up time ³⁾	< 5 min				
Housing / protection class	PC / housing: IP65, probe: IP20				
Cable gland	M16 x 1.5 cable Ø 4.5 - 10 mm (0.18 - 0.39")				
Electrical connection	screw terminals max. 1.5 mm ² (AWG 16)				
Electromagnetic compatibility	EN61326-1	FCC Part 15			
	EN61326-2-3				
Working temperature and conditions		095% RH (not condensating)			
Storage temperature and conditions	-2060°C (-4140°F)				
1) minimum flow speed 1m/s (200ft/min)					

1) minimum flow speed 1m/s (200ft/min)

2) Versions with analog output can be provided with a passive temperature sensor. This is fitted in the filter cap.

3) warm up time for performance according to specification





v1.6

Features

Dimensions (mm)_


Operation Principle

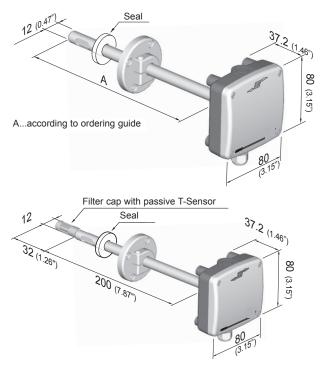



Connection Diagram

Analogue Output Analog Ausgang



Passive T-Sensor optional.


Ordering Guide

$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	MEASURING RANGE	MODEL	OUTPUT	T-SENSOR (only passive)	PROBE LENGTH (see dimensions "A")
	05000ppm (5)	2	0 - 10V (3) 4 - 20mA (6)		

Switching output (S) only available for model C
Version CP only possible with 200mm (7.87").

Switching Output

HLX85-xCSx



Order Example

05000ppm
CO,
0 - 10V
200mm